

1 ZÖLLNER Zet-Horn 110 AC

- BSH Class I - BSH 49/02 P/02/95 -

design to drawing SP 14126-4
operating on AC 3phase

intensity in 1/3rd-octave band level
at 1 metre 143 dB

fundamental frequency 110 Hz

comprising:

1 electric motor, 5.5 kw
with corrosion resistant cylinder
suspended vertically for
complete water drainage

1 sound horn: aluminum - RFG

approx. net weight: 100 kg

1 Control 4476

with anti-condensation heating,
casing and bimetal relay
for above Zet-Horn
design to drawing SP 4476
main tension: AC 3phase
control tension: AC 1phase
approx. net weight: 13.5 kg


1 Set of Spare Parts for above Zet-Horn110 AC

according to list Li 144
approx. net weight: 0.6 kg



Zöllner Zet-Horn 110 AC

Schiffslänge 200m und mehr / length of vessel 200 m or more

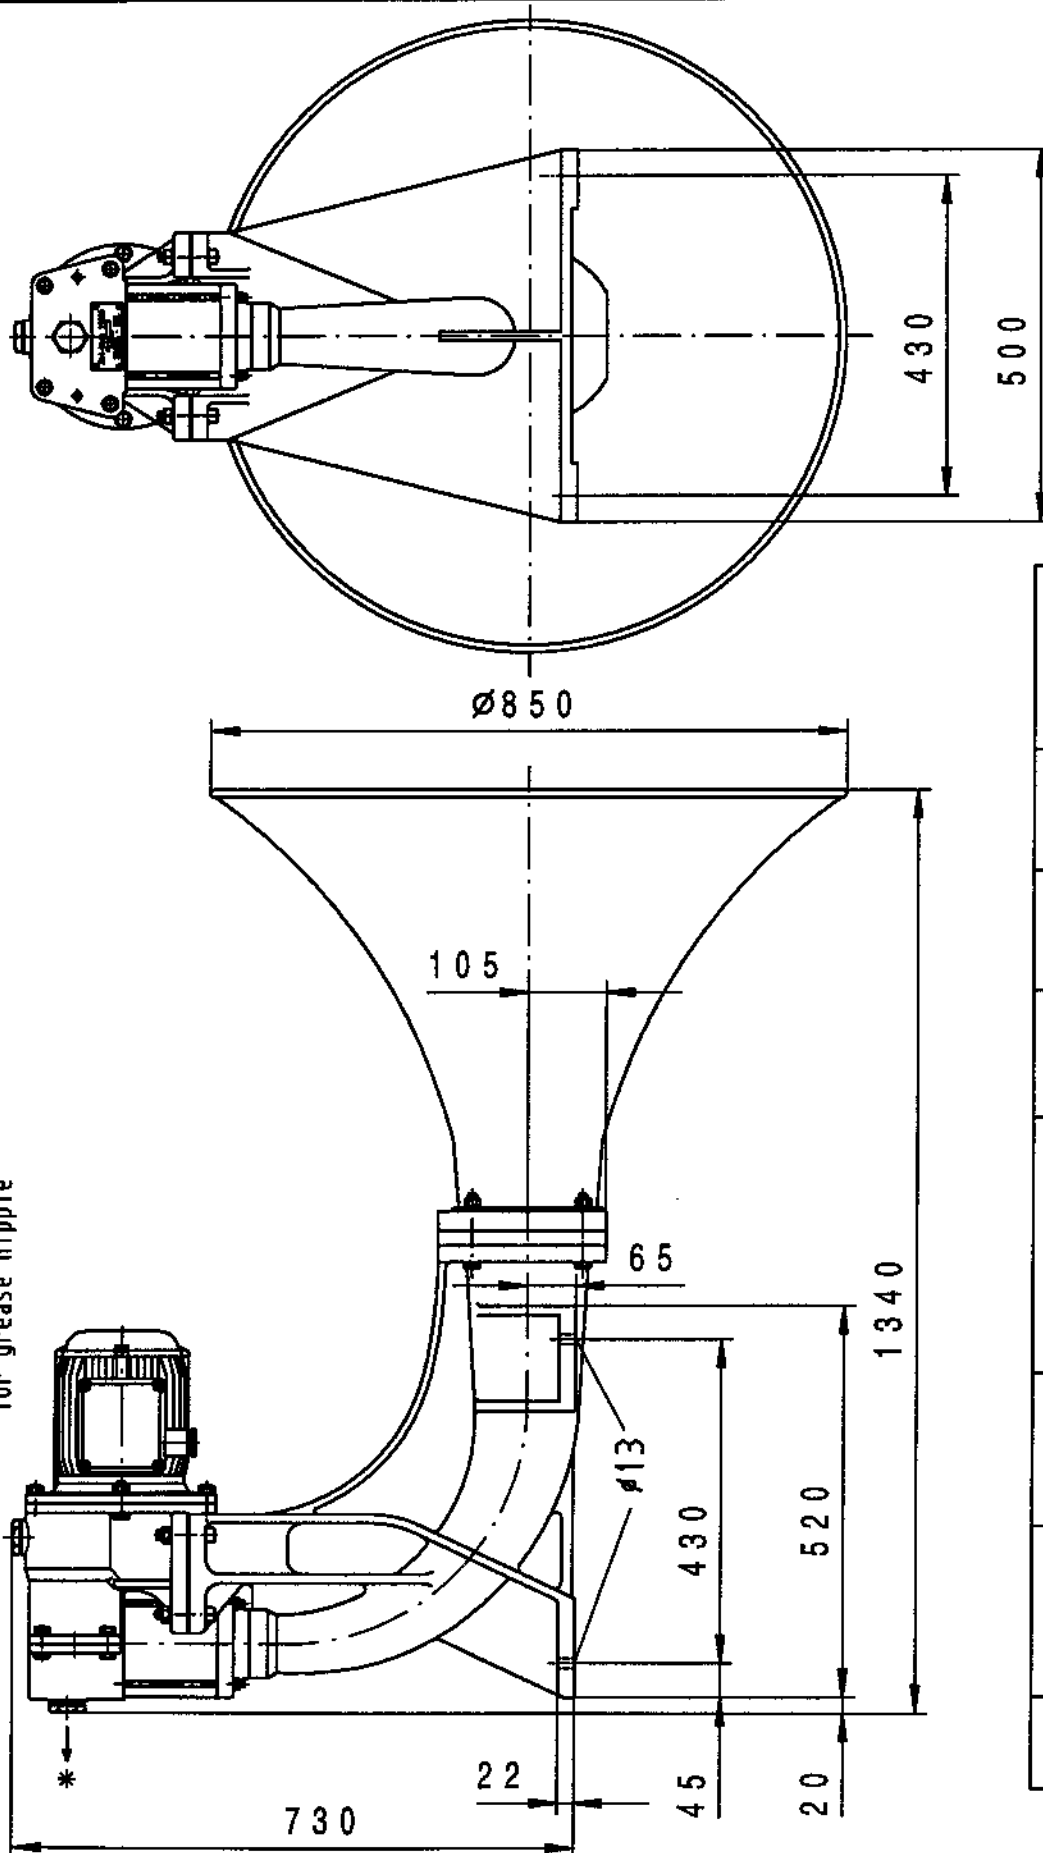

TYP	CURRENT FREQUENCY 50HZ 60HZ	BASIC FREQUENCY	SOUND INTENSITY AT 1 M DISTANCE dB(A) 1/3rd oct	MOTOR OUTPUT	MOTOR HEATING up to	WEIGHT	TYP TEST BSH-NO (DH1)
110AC	..5 ..6	110HZ	146 143	5,5KW	250W	90KG	49/02P/02/95

Änderung vorbehalten! Subject to alteration!

05.07.99 Sch.


ZÖLLNER • KIEL

SP 14126 -4



Zet-Horn Steuergerät (Stillstandsheizung mit Bi-metall)
Zet-Horn Control (Motor Heating with Bimetal Protection)

SP
4476 -4

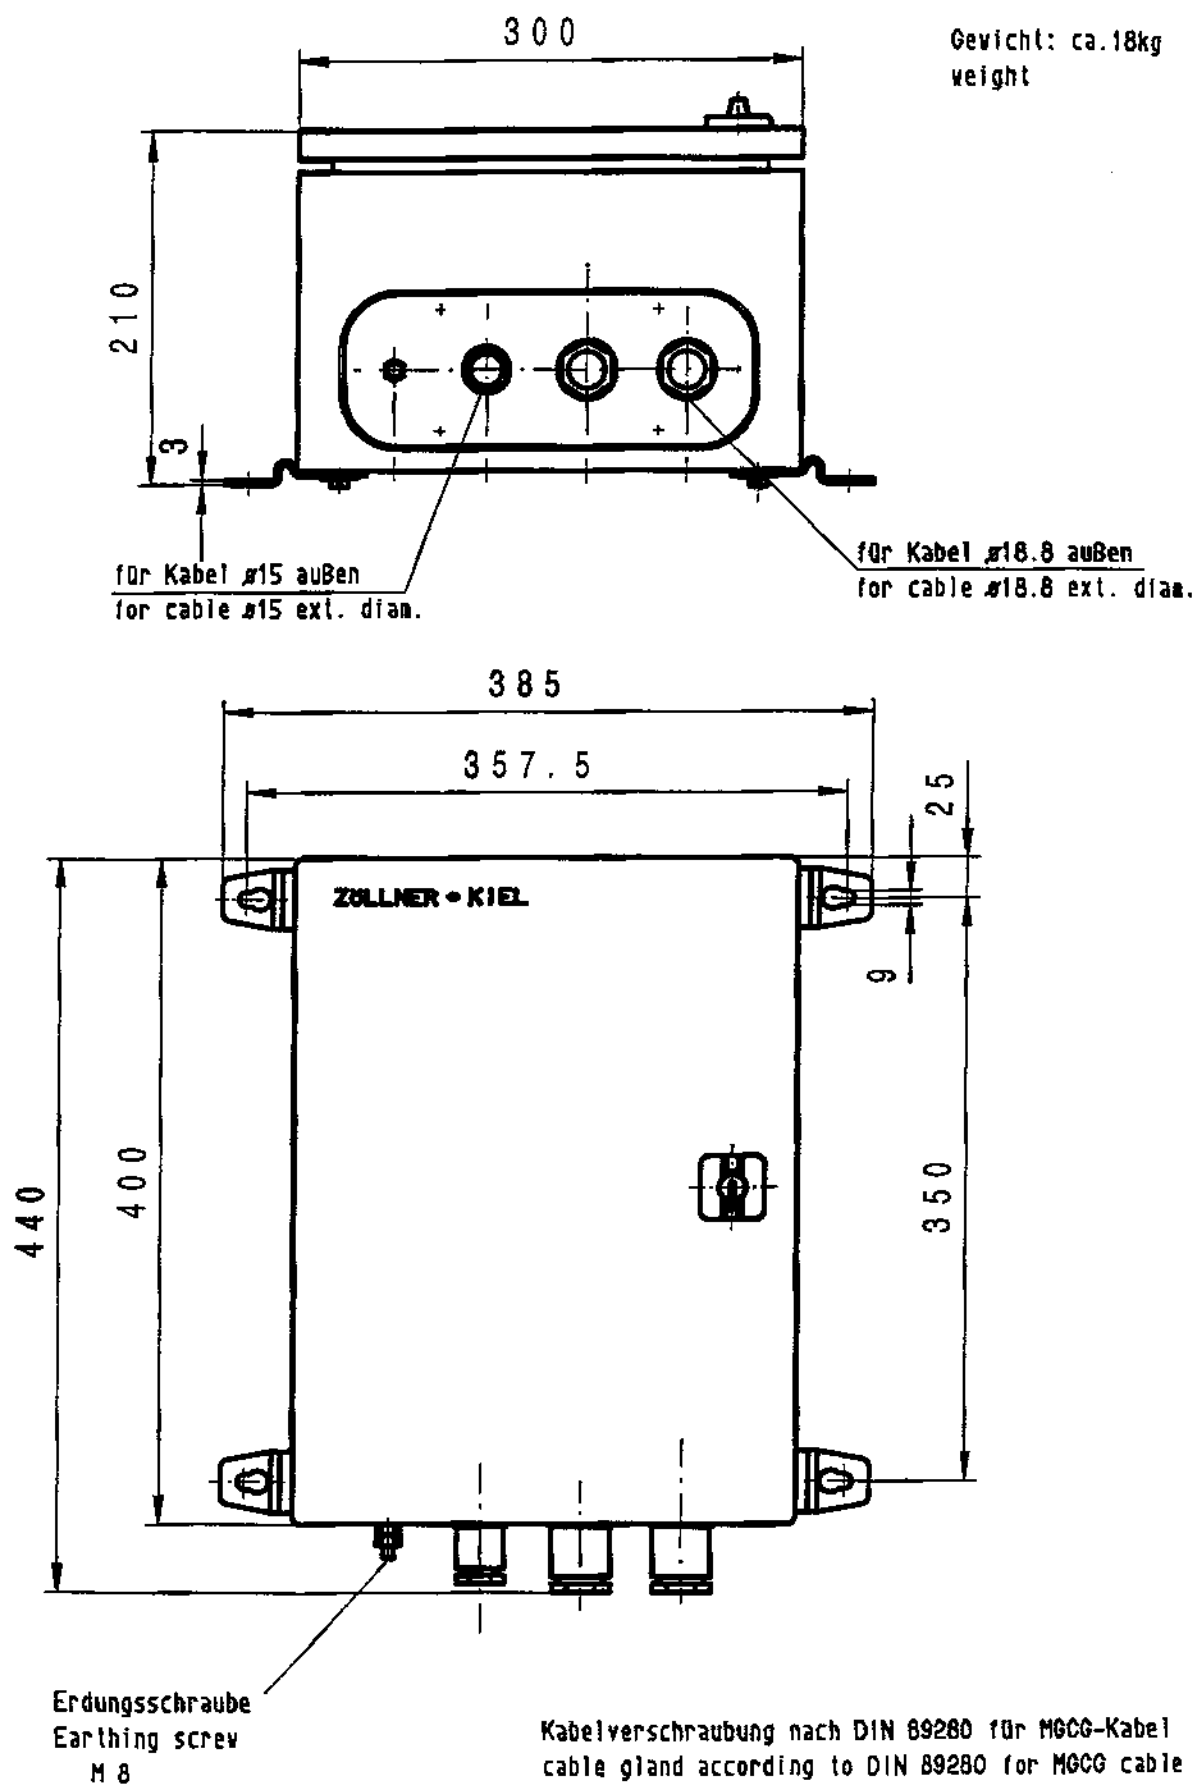


Änderungen vorbehalten! Subject to alteration!

12.01.95 Sch.

ZÖLLNER • KIEL

ZÖLLNER ZET-HORN 141AC - 70AC

with bimetal relay and anti-condensation heating

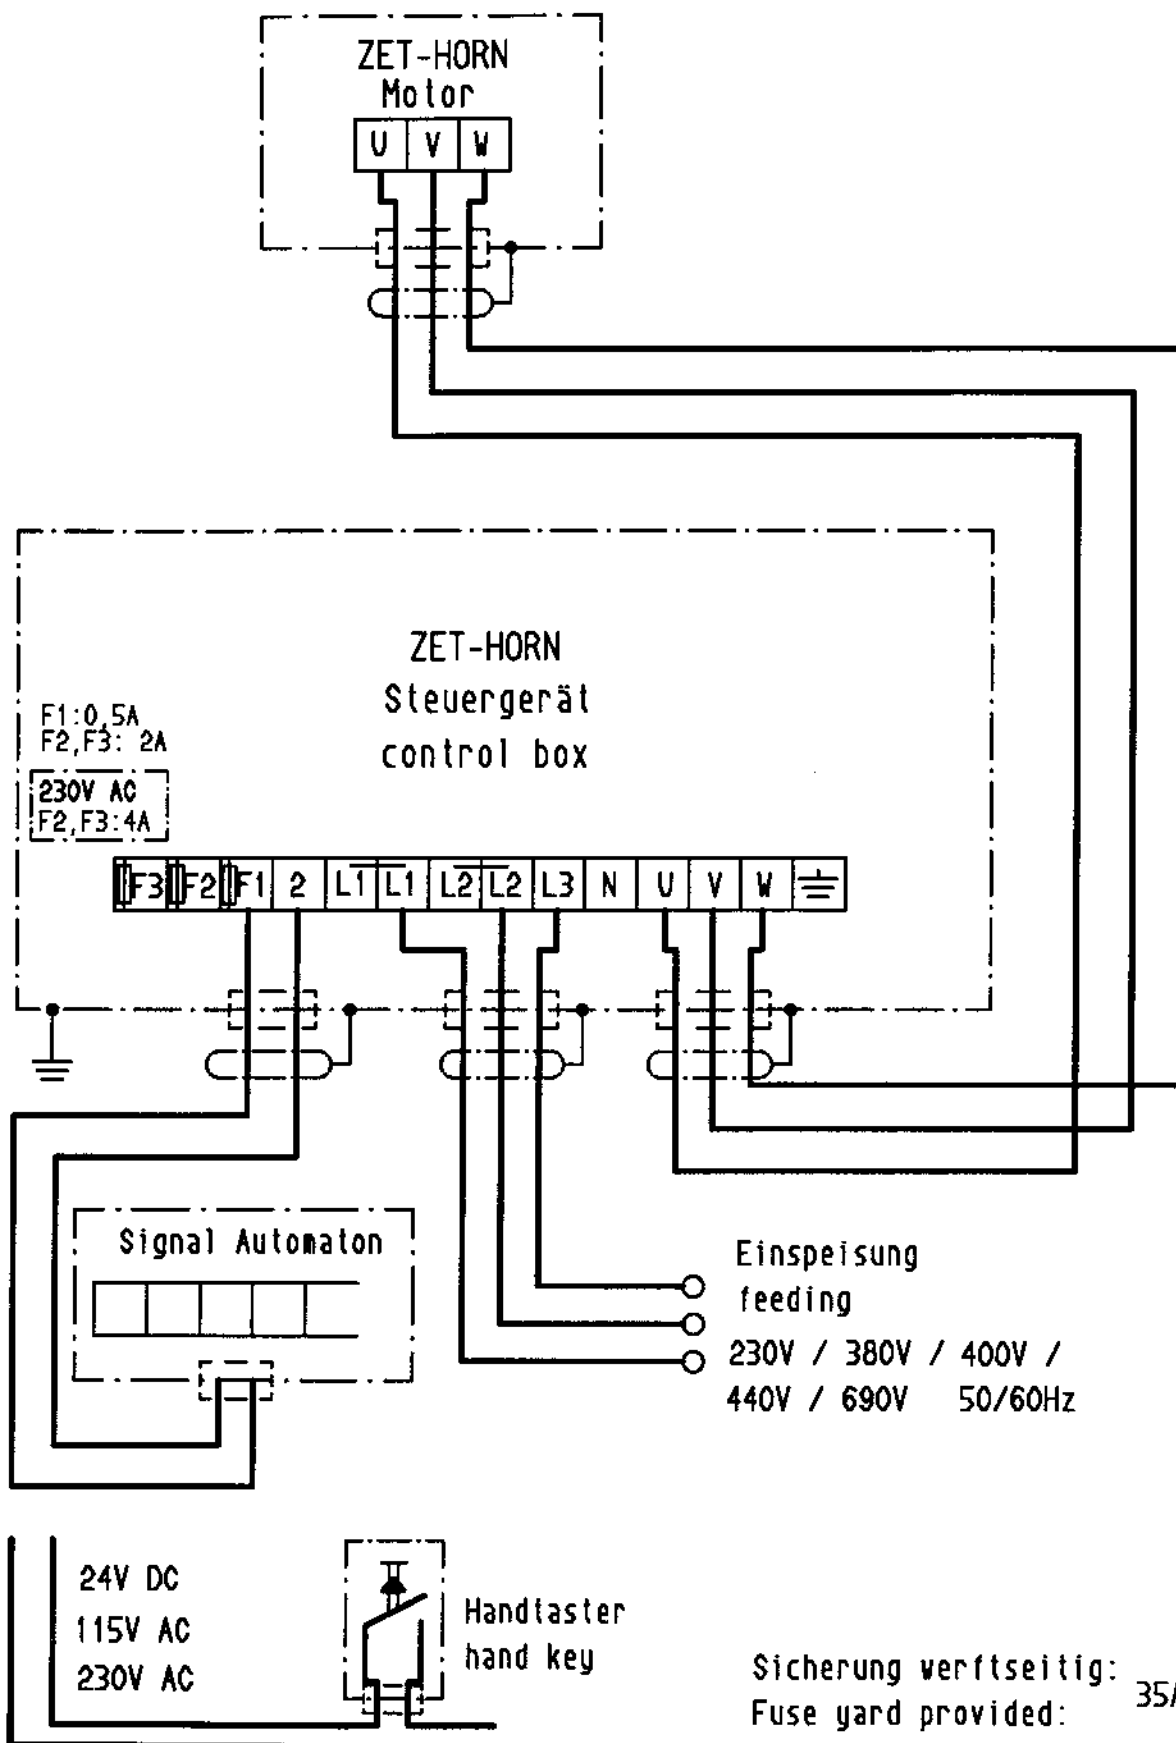

**Änderung vorbehalten!
Subject to alteration!**



Ersatzteilsatz für Zet-Horn
Set of spare parts for Zet-Horn

90-141AC

Stck. Qty.	Zeichnung Drawing	Benennung/techn.Daten Designation/techn.Data	Teil Nr. Part no.	Bestell-Nr. Order no.	Gewicht Weight kg
1		Rillenkugellager Grooved ball bearing 6206-2 RS1	8503-220	251062061	0,200
1		Rillenkugellager Grooved ball bearing 6207-2 RS1	8503-250	251062071	0,280
2		Kolbenring m. Wellfeder piston ring w. spring #120/110x8	8503-440 8503-441	0105069 0104757	0,075

Änderung vorbehalten!
Subject to alteration!

29.06.95 Sch.
16.05.00 Sch.

ZÖLLNER • KIEL

017144 -4